



Indicative type configuration



MYHOOK

AUTOMATION FOR SWING GATES

Electromechanical operator with articulated arm for swing gates up to 2 m.

A powerful noiseless electromechanical operator suitable for large pillars, inwards or outwards openings, wide angle openings. This operator owns an embedded control board and an adjustable electric limit-switch in order to safely adjust its cycles and meets most of the needs in terms of length and weights. It can be supplied in 230V and 24V. The 24V version is suitable for an intensive use and it can be equipped with a backup battery in case of power cut.



KIT COMPOSITION



MYHOOK

1

Gear motor with control unit



MYRL

2

Flashing light



MYRF

3

Safety photocells set



MYKEY

4

Remote keyfob



MYKEY

5

Remote keyfob

OPTIONAL



MYRT_
wireless keypad



RT35_
stainless steel keypad



RT36_
polycarbonate keypad



MYRS_
key switch



ANT02_
aerial




MEL04_
electro-lock module interface



MYRF_
safety photocells set



DIMENSIONS

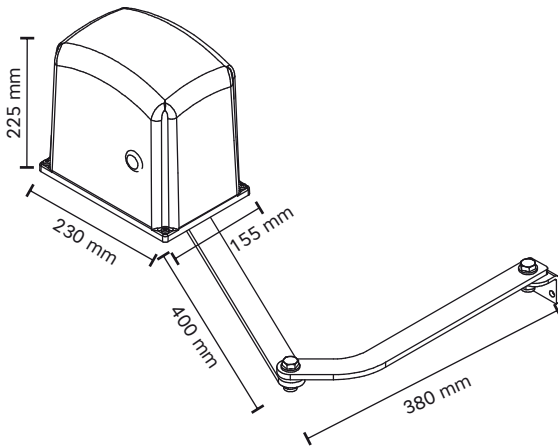

years of warranty **3**

TECHNICAL DATA

		MYHOOK 24	MYHOOK	
Power supply	V	24V dc	230V~50Hz	115V~60Hz
Current	A	0.5-0.75	1.2 - 1.7	2.0 - 2.3
Motor power	W	50	300	300
Capacitor	mF	-	10	30
Thermic protection	C°	-	150	150
Max thrust	N	200	280	280
IP class protection	IP	44	44	44
Revolution speed	rpm	1600	1400	1700
Max opening angle	deg	130°	130°	130°
90° opening time	s	14"	18"	14"
Max leaf weight	Kg	200	250	250
Max leaf length	m	2.00	2.00	2.00
Duty cycle	%	80	40	40