

MYSTRIKE

AUTOMATION FOR SLIDING GATES

Rack-driven motor for sliding gates up to 800 kg.

Slim elegant design, silent movement. Noble metal gears, bronze transmission shaft. Adjustable ground plate (horizontally and vertically).

Key-lock release system, protected by an encrypted key.

Embedded control board featuring obstacle detection and plug-in radio receiver.

Ideal solution for residential, industrial and apartment block settings.

The 24V range can operate in emergency mode during power outages by back-up batteries.



KIT COMPOSITION



1

Gear motor with embedded control unit



MYRL

2

Flashing light



MYRF

3

Safety photocells set



MYKEY

4

Remote keyfob



MYKEY

5

Remote keyfob



B120

6

4m PVC rack

OPTIONAL



MYRT_
wireless keypad



RT35_
stainless steel keypad



RT36_
polycarbonate keypad



MYRS_
key switch



ANT02_
aerial



MRX01_
radio channel aux module




MYRF_
safety photocells set



B102_
stainless steel rack

DIMENSIONS

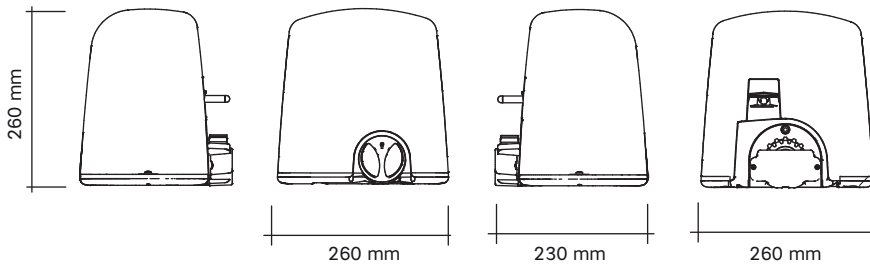

TECHNICAL DATA

		MYSTRIKE 6	MYSTRIKE 5		MYSTRIKE 8	
Power supply	V	24V dc	230V~50Hz	115V~60Hz	230V~50Hz	115V~60Hz
Current	A	0.7-1.0	1.2 - 1.7	2.0 - 2.3	1.2 - 2.0	2.8 - 3.2
Motor power	W	80	250	280	300	330
Capacitor	mF	-	10	30	10	30
Thermic protection	C°	-	150	150	150	150
Max thrust	N	400	350	380	440	460
IP class protection	IP	44	44	44	44	44
Revolution speed	rpm	1600	1400	1700	1400	1700
Opening speed	m/min	6-11	10.5	12	10.5	12
Max gate weight	Kg	600	500	500	800	800
Duty Cycle	%	80	40	40	40	40

years of warranty **3**