

Universal



Universal B



Universal B/2M

UNIVERSAL

AUTOMATION FOR ROLLING SHUTTERS

Suitable for residential and industrial areas.

Suitable for existing or brand new shutters. Built-in limit switches, to ensure easier safe regulation in opening and closing. Available in reversible or locked version, featuring electro-break and release system for manual operation.

Transmission gear accessories and spring pulley adapters included.

For big shutters dual-motor operator available.

OPTIONAL



MYRT_
wireless keypad



RT23_
safe box with
release lever



Q45
230V
control unit




MYRS_
key switch



MYRL_
flashing light




MYRF_
safety photocells set

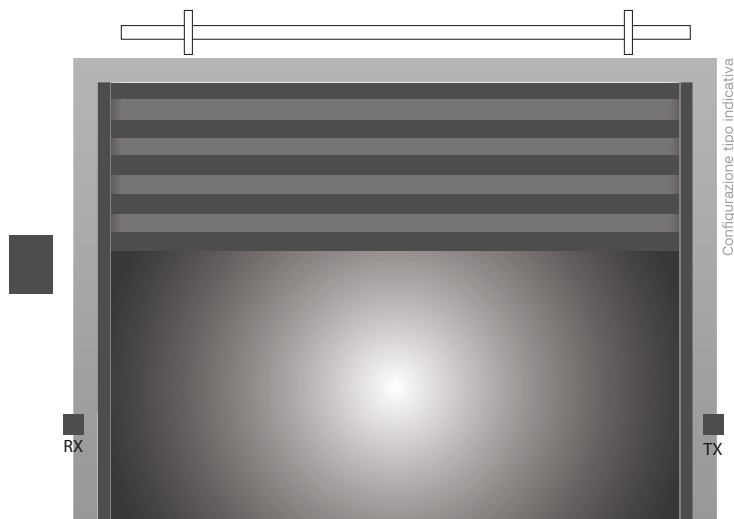

DIMENSIONS


200 mm Universal B
240 mm Universal B/2M

60



385 mm Universal B
400 mm Universal B/2M

320 mm Universal



years of
warranty **3**

TECHNICAL DATA

Power supply V
Current A
Motor power W
Thrust Nm
Pulley speed rpm
Max load Kg
Max stroke m
Drive-shaft diameter mm
Spring-holder pulley mm
Duty Cycle %

	UNIVERSAL	UNIVERSAL B	UNIVERSAL 2M
Power supply	230V~50/60Hz	230V~50/60Hz	230V~50/60Hz
Current	2.7	2.7	5.5
Motor power	600	600	1260
Thrust	178	168	443
Pulley speed	10	10	8
Max load	170	170	360
Max stroke	6	6	6
Drive-shaft diameter	60/48	60/48	76/101
Spring-holder pulley	200/220	200/220	240/280
Duty Cycle	30	30	30